

# Security Direct


## M2M Security Gate Order Form

### PLAN VIEW

Inside



### SECTION VIEW

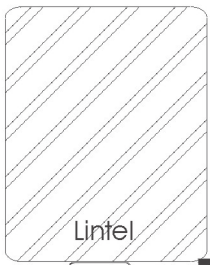

B = Opening Height

Floor/Step

F

### PLAN VIEW

Inside




Face Fix  
A\*

Face Fix  
A\*

G

NOT TO SCALE

# M2M Security Gate Order Form

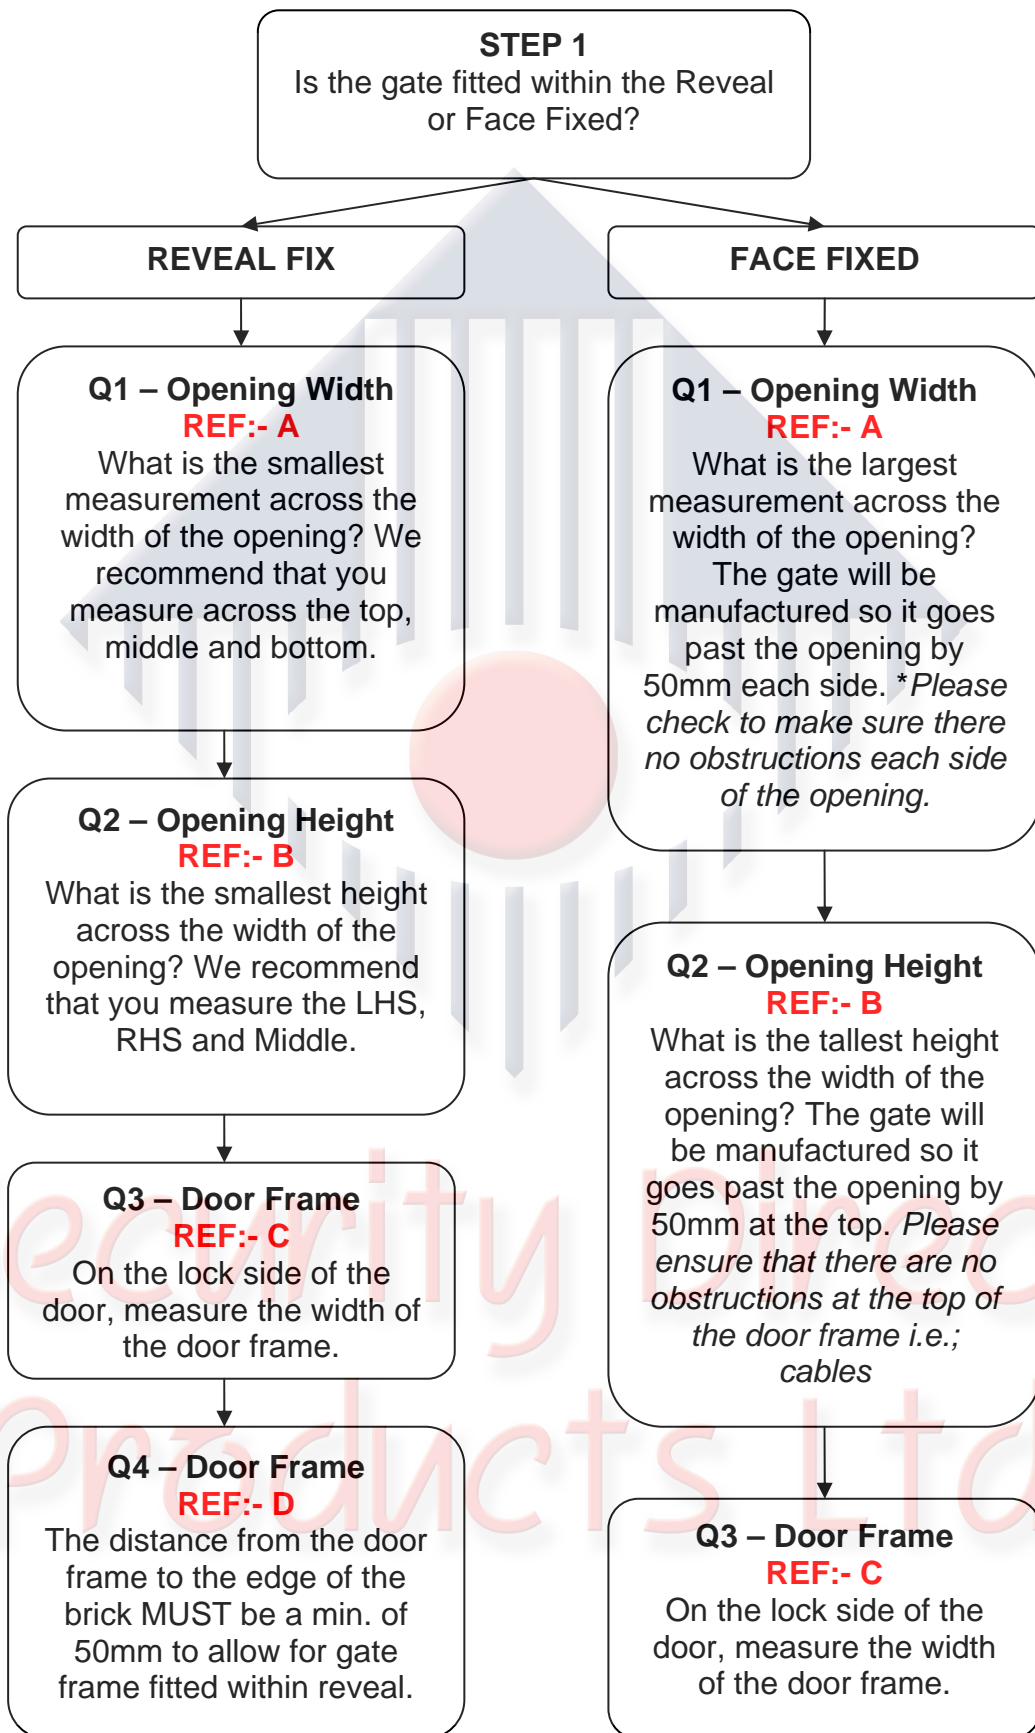

**REVEAL FIX CONTINUED**

**Q5 – Door Handle**  
**REF:- E**

The distance from the door Handle to the edge of the brick MUST be a min. of 40mm to allow for the gate to close within its frame.

**Q6 – Hinge Side**

Please confirm the side you want the gate to hinge. This is done from the outside of the door looking in.

**Q7 – Letterbox**  
**REF:- G**

If you require a letterbox cut out in the gate then measure the distance from the floor to the centre line of the letterbox.

**FACE FIXED CONTINUED**

**Q4 – Door Handle**  
**REF:- E**

The Door Handle must NOT protrude past the surface of the brickwork by a maximum of 20mm to allow for the gate to close within the frame.

**Q5 – Door Step**  
**REF:- F**

The distance the step protrudes past the brick recess. *This helps us decide on the size of flat bar we can use as the gate threshold.*

**Q6 – Hinge Side**

Please confirm the side which you want the gate to hinge and if you want the gate to open 90 or 180 degrees. This is done from the outside of the door looking in.

**Q – Letterbox**  
**REF:- G**

If you require a letterbox cut out in the gate then measure the distance from the floor to the centre line of the letterbox.