



RECESS OR SURFACE FIX



If possible, it is always better to RECESS Fix the Product as it provides a stronger fixing, giving a higher level of security.

We also recommend that you have the grille visible from the outside, as it will provide a visual deterrent. To ensure this you will have the Window, Grille and then the Curtain/Blinds.

Diagram showing the product RECESS fixed

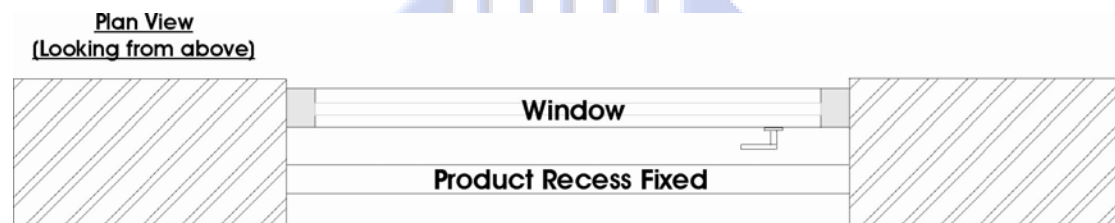



Diagram showing the product SURFACE fixed



Security

If you require any further information or advice
Please call our Technical Support Team
0113 248 4747

Can you Recess Fix the Grille/Shutter? (Best option if possible)

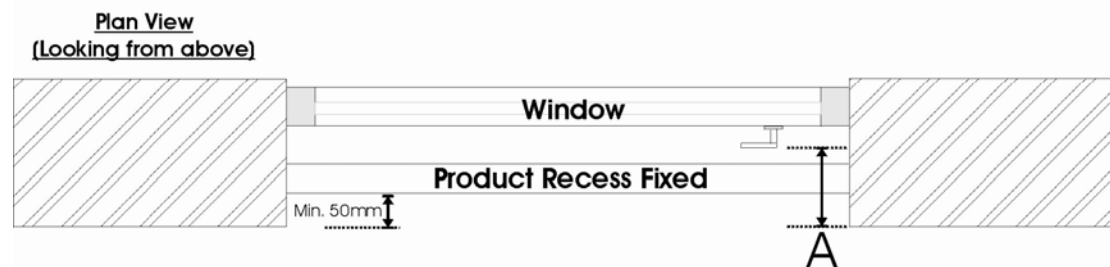

To ensure the grille/shutter can be RECESS fixed, you will need to measure distance **A** shown in the above diagram. Depending on the product will depend on the minimum sizes required, shown in the table below;


Product	A = Minimum Depth Required for Recess Fixing
Other Fixed Grilles	90mm
Diamondguard Fixed Grilles	70mm
Folding Grilles	90mm
Roller Shutters	80mm

We recommend that the product is fitted 50mm from the front edge of the recess to the front edge of the product. If the product is fitted closer than 50mm from the edge of the recess then you run the risk of breaking the edge of the brickwork. If you don't have the minimum sizes required, then we recommend that you SURFACE fix the grille/shutter.

Decor-Grille
Security

If you require any further information or advice
Please call our Technical Support Team
0113 248 4747

MEASURING FOR RECESS FIXING

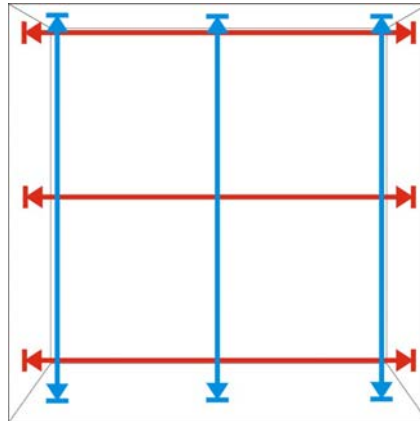

DIAMONDGUARD FIXED GRILLES

The measurements are not as critical with this product as it comes with adjustable arms. You only need to take the Middle Measurement for Width and Height

ALL OTHER FIXED SECURITY GRILLES

We suggest that you take all three measurements across the width and height as shown above. To order the product we will need to know the smallest width and height sizes in mm. Fixed security grilles do not have any tolerance, they cannot be cut down in width or height, so the measurements are critical.

FOLDING SECURITY GRILLES

We suggest that you take all three measurements across the width and height as shown above. When you order the product, we will need to know the smallest width and height sizes in mm. Folding security grilles do have a bit of tolerance across the width, as the track can be cut down if required. However the height is critical, as there is only a few millimeters tolerance and the grille cannot be cut down in Height.


ROLLER SHUTTERS

We suggest that you take all three measurements across the width and height as shown above. When you order the product, we will need to know the smallest width and height sizes in mm. Roller shutters do have a bit of tolerance with the height, as the side guide rails can be cut down if required. The width is critical, as there is only a few millimeters tolerance and the grille cannot be cut down in Width.

If you are not sure it's always better to order the product a few millimeters smaller, as it's always possible to pack the product to fit the opening and Silicone the gaps.

**If you require any further information or advice
Please call our Technical Support Team
0113 248 4747**

MEASURING FOR SURFACE FIXING

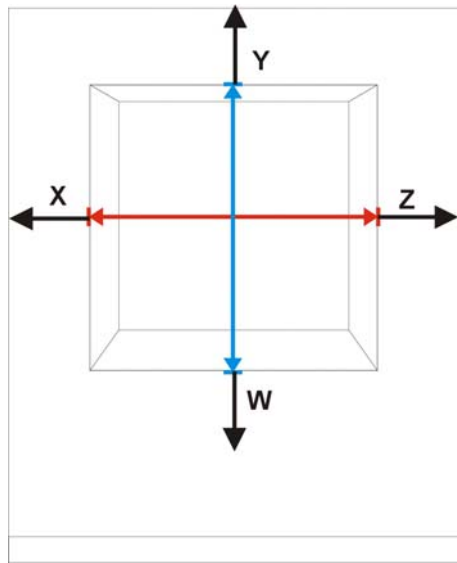

DIAMONDGUARD FIXED GRILLES

The measurements are not as critical with this product as it comes with adjustable arms. You only need to take the Middle Measurement for Width and Height. We will manufacture the grille to the opening size and add 50mm each side and the top for the fixing arms.

ALL OTHER FIXED SECURITY GRILLES

You only need to take the Middle Measurement for Width and Height. We will add 150mm to your width and height to manufacture the grille.

FOLDING SECURITY GRILLES

You only need to take the Middle Measurement for Width and Height. To obtain your Overall Size you need to ensure that you have at least 50mm at the top of the opening and the sides will depend on the width of the opening (Ring Our Technical Support Team for the Bunch Stacks). The bottom of the grille usually sits on top of the window cill.

ROLLER SHUTTERS

You only need to take the Middle Measurement for Width and Height. You need to ensure that you have at least 100mm down each side for the guide rails. The Headroom (Y) at the top of the opening will depend on the Box Size (Ring Our Sales Team for the Shutter Box Sizes).

If you are not sure its always better to order the product a few millimeters bigger, because you don't want it too close to the edge of the recess as when it comes to fixing you don't want to break the edge of the brickwork.

**If you require any further information or advice
Please call our Technical Support Team
0113 248 4747**